


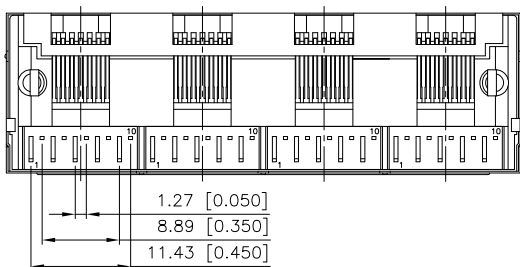


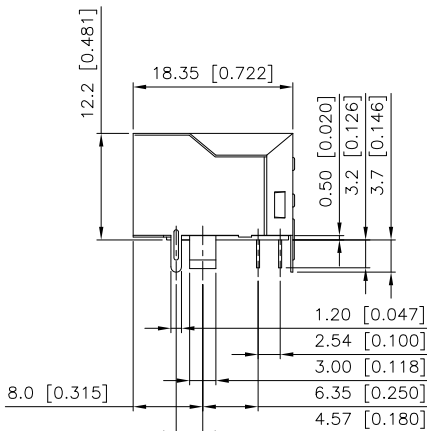

**HALO**

HCJ149141K  
YYWW

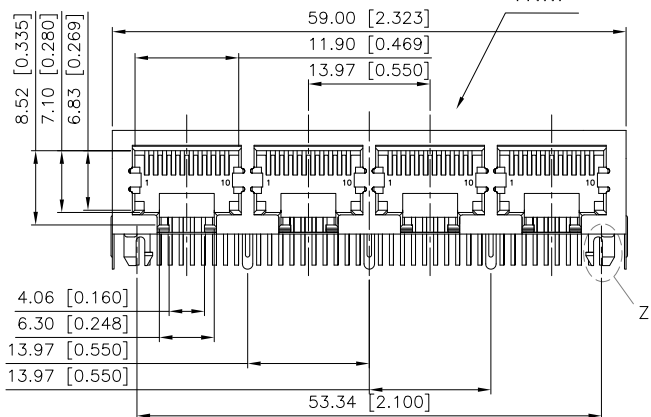

DETAIL Z  
SCALE 2:1

DIMENSIONS: mm [inch]  
TOLERANCE: .XX ±0.25 [0.010]  
.X ±0.30 [0.012]

**PART NO. : HCJ14-9141K**

10P/10C, RIGHT ANGLE, THROUGH-HOLE  
LEAD-FREE/RoHS COMPLIANT  
OPERATING TEMPERATURE: -40°C/+85°C  
VOLTAGE/CURRENT: 125VAC/1.5A  
DWV: 1kVAC/60s CONTACT-CONTACT,  
1.5kVAC/60s CONTACT-SHIELD

**MATERIAL:**

HOUSING: HIGH THERMOPLASTIC, UL94V-0, BLACK  
CONTACTS: PHOSPHOR BRONZE,  
30u" GOLD PLATING ON CONTACT AREA,  
NICKEL UNDERPLATING OVERALL  
SHIELD: COPPER ALLOY, NICKEL PLATING  
INSERTION/EXTRACTION FORCE: 4 POUNDS MAX.  
DURABILITY: 750 MATING CYCLES MIN.  
CAVITY CONFORMS TO FCC RULES AND REGULATIONS  
PART 68, SUBPART F

 CALIFORNIA, USA KOWLOON, HONG KONG SINGAPORE	TITLE	10P/10C 1X4 RJ45	SIGNATURES	DATE	REV.	DESC.	DATE	
	FOR	RIGHT ANGLE, THROUGH-HOLE	DRAWN	LI ZHI ZHONG	7/12/18	A	INITIAL RELEASE	7/12/18
	PART NO.	HCJ14-9141K	CHECKED	LEI KEONG	7/12/18			
	SCALE	NONE	APPROVED	PETER LU	7/12/18			
	PAGE	1 OF 2	FILE	HCJ14-9141K.DWG				

